



KT88SC

Beam Tetrode



The KT88SC has an absolute maximum anode dissipation rating of 50W and is designed for use in the output stage of an a.f. amplifier. Two tubes in Class AB1 give a continuous output of up to 120W. The KT88SC is also suitable for use as a series tube in a stabilised power supply.

HEATER

V _h	6.3	V
I _h (approx.)	1.6	A

MAXIMUM RATINGS

Absolute and Design Maximum		
V _a	800	V
V _{g2}	600	V
V _{a,g2}	600	V
-V _{g1}	200	V
p _a	50	W
p _{g2}	8	W
p _{a+g2}	59	W
I _k	230	mA
V _{h-k}	250	V
T _{bulb}	250	°C
R _{g1-k} (cathode bias)		
p _{a+g2} ≤ 40W	470	kΩ
p _{a+g2} > 40W	270	kΩ
Rg1-k (fixed bias)		
p _{a+g2} ≤ 40W	220	kΩ
p _{a+g2} > 40W	100	kΩ

Revised 11/06/00



P E N T A L A B O R A T O R I E S

9740 COZYCROFT AVENUE * CHATSWORTH * CALIFORNIA 91311
(800) 421-4219 * (818) 882-3872 * FAX: (818) 882-3968

ELECTRON TUBES FOR INDUSTRY



KT88SC

BEAM TETRODE

CAPACITANCES (measured on a cold unscreened tube)

Triode Connection

$C_{g1-a,g2}$	7.9	pF
$C_{g1-all\ less\ a,g2}$	9.3	pF
$C_{a,g2-all\ less\ g1}$	17	pF

Tetrode Connection

C_{g1-a}	1.2	pF
$C_{g1-all\ less\ a}$	16	pF
$C_{a-all\ less\ g1}$	12	pF

CHARACTERISTICS

Triode Connection

$V_{a,g2}$	250	V
I_{a+g2}	143	mA
$-V_{g1}$ (approx.)	15	V
g_m	12	mmho
r_a	670	Ω
μ	8	

Tetrode Connection

V_a	250	V
V_{g2}	250	V
I_a	140	mA
I_{g2} (approx.)	3	mA
$-V_{g1}$ (approx.)	15	V
g_m	11.5	mmho
r_a	12	k Ω
μ_{g1-g2}	8	

TYPICAL OPERATION**Push-Pull. Class Ab1, Cathode Bias, Tetrode Connection**

$V_{a(b)}$	560	V
$V_{a(o)}$	552	V
V_{g2}	300	V
$I_{a(o)}$	2 x 64	mA
I_a (max signal)	2 x 73	mA
$I_{g2(o)}$	2 x 1.7	mA
I_{g2} (max signal)	2 x 9	mA
$R_{L(a-a)}$	9	k Ω
* R_k	2 x 460	Ω
$-V_{g1}$ (approx.)	30	V
P_{out}	50	W
D_{tot}	3	%



KT88SC

BEAM TETRODE

**I.M.	11	%
$p_{a(o)}$	2 x 33	W
p_a (max signal)	2 x 12	W
$p_{g2(o)}$	2 x 0.5	W
p_{g2} (max signal)	2 x 2.7	W
$V_{(g1-g1)}$ (ac) crest	60	V

* It is essential to use two separate cathode bias resistors.

** Intermodulation distortion; measured using two input signals at 50 and 6000 Hz (ratio of amplitude 4:1)

Push-Pull. Class AB1, Fixed Bias, Tetrode Connection

$V_{a(b)}$	560	V
$V_{a(o)}$	552	V
V_{g2}	300	V
$I_{a(o)}$	2 x 60	mA
I_a (max signal)	2 x 145	mA
$I_{g2(o)}$	2 x 1.7	mA
I_{g2} (max signal)	2 x 15	mA
$R_{L(a-a)}$	4.5	kΩ
* $-V_{g1}$ (approx.)	34	V
P_{out}	100	W
D_{tot}	2.5	%
**I.M.	10	%
$p_{a(o)}$	2 x 33	W
p_a (max signal)	2 x 28	W
$p_{g2(o)}$	2 x 0.5	W
p_{g2} (max signal)	2 x 4.5	W
$V_{(g1-g1)}$ (ac) crest	67	V

* It is essential to provide two separately adjustable bias voltage sources, having a voltage adjustment range of +/- 25%

** Intermodulation distortion; measured using two input signals at 50 and 6000 Hz (ratio of amplitude 4:1)

Push-Pull. Class AB1, Cathode Bias, Ultra-Linear Connection (40% Tapping Points)

$V_{a,g2(b)}$	500	375	V
$V_{a,g2(o)}$	436	328	V
$I_{a+g2(o)}$	2 x 87	2 x 87	mA
I_{a+g2} (max signal)	2 x 99	2 x 96	mA
$R_{L(a-a)}$	6	5	kΩ
* R_k	2 x 600	2 x 400	Ω
- V_{g1} (approx.)	52	35	V



KT88SC

BEAM TETRODE

P _{out}	50	30	W
D _{tot}	1.5	1	%
**I.M.	4	3	%
p _{a+g2(o)}	2 x 38	2 x 28.5	W
p _{a+g2} (max signal)	2 x 17	2 x 16	W
V _(g1-g1) (ac)crest	104	71	V
Z _{out}	4.8	4.5	kΩ

* It is essential to use two separate cathode bias resistors.

** Intermodulation distortion; measured using two input signals at 50 and 6000 Hz (ratio of amplitudes 4:1)

Push-Pull. Class AB1, Fixed Bias, Ultra-Linear Connection (40% Tapping Points)

V _{a,g2(b)}	560	460	V
V _{a,g2(o)}	553	453	V
I _{a+g2(o)}	2 x 50	2 x 50	mA
I _{a+g2} (max signal)	2 x 157	2 x 140	mA
R _{L(a-a)}	4.5	4	kΩ
*-V _{g1} (approx.)	75	59	V
P _{out}	100	70	W
D _{tot}	2	2	%
**I.M.	11	10	%
p _{a+g2(o)}	2 x 27.5	2 x 22.5	W
p _{a+g2} (max signal)	2 x 33	2 x 27	W
V _(g1-g1) (ac)crest	140	114	V
Z _{out}	7	6.5	kΩ

* It is essential to provide two separately adjustable bias voltage sources, having a voltage adjustment range of +/- 25%

** Intermodulation distortion; measured using two input signals at 50 and 6000 Hz (ratio of amplitude 4:1)

Push-Pull. Class AB1, Cathode Bias, Triode Connection

V _{a,g2(b)}	400	485	V
V _{a,g2(o)}	349	422	V
I _{a+g2(o)}	2 x 76	2 x 94	mA
I _{a+g2} (max signal)	2 x 80	2 x 101	mA
R _{L(a-a)}	4	4	kΩ
-V _{g1} (approx.)	40	50	V
P _{out}	17	31	W
D _{tot}	1.5	1.5	%
*I.M.	5.6	5.6	%
p _{a+g2(o)}	2 x 26.5	2 x 40	W
p _{a+g2} (max signal)	2 x 19	2 x 27	W



KT88SC

BEAM TETRODE

R_k	2 x 525	2 x 525	Ohms
$V_{(g_1-g_1)}(\text{ac})\text{crest}$	78	114	V
Z_{out}	2	1.9	k Ω

* Intermodulation distortion; measured using two input signals at 50 and 6000 Hz (ratio of amplitude 4:1)


INSTALLATION

The tube may be mounted either vertically or horizontally.

When the tubes are mounted vertically, it is recommended that the centers of the tube sockets are not less than 4 inches apart and that pins 4 and 8 of each tube are in line.

When the tubes are mounted horizontally, it is recommended that the centers of the tube sockets are not less than 4 inches apart and that pins 4 and 8 of each tube are in the same vertical line. One tube should not be mounted directly above another.


Free air circulation around the tube is desirable.

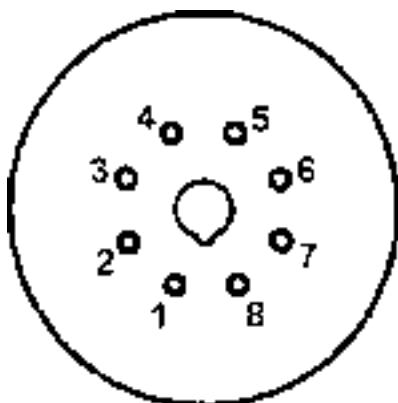

Base: Metal shell, wafer octal


Pin:

1. N.C.
2. h
3. a
4. g2
5. g1
6. N.C.
7. h
8. k,bp

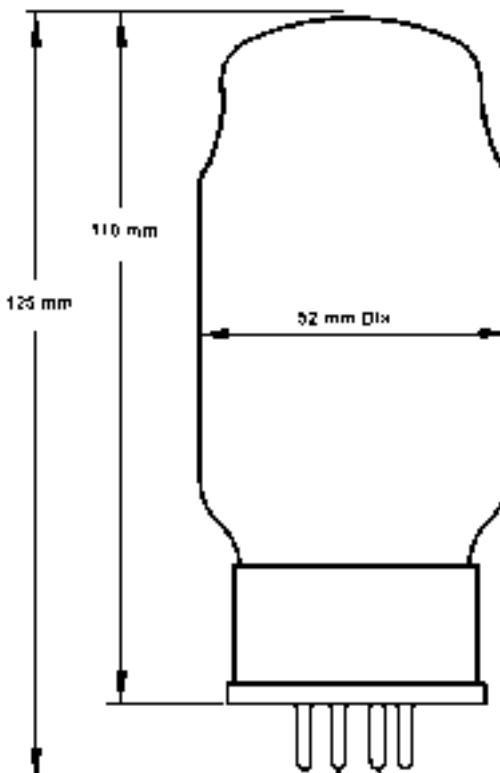




KT88SC BEAM TETRODE

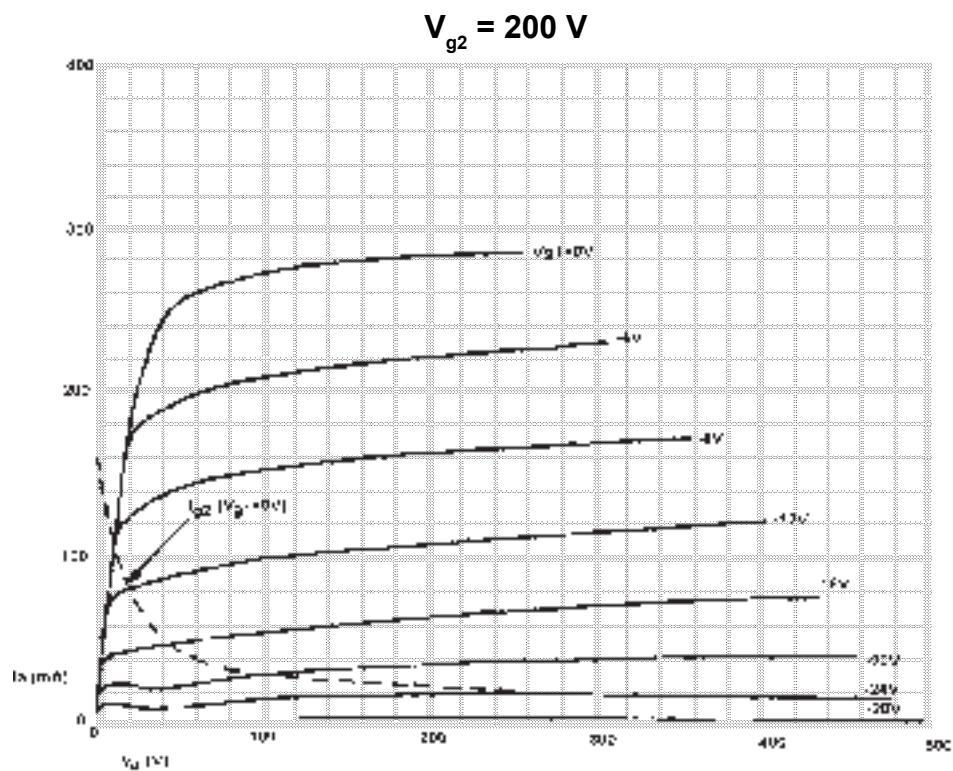

Triode Configuration

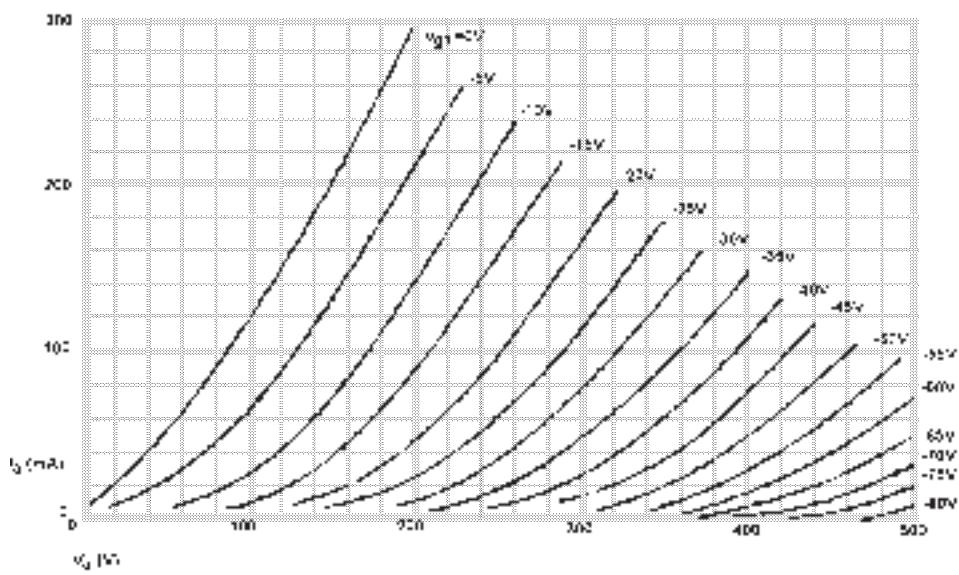



KT88SC BEAM TETRODE

Ultra Linear Connection 40% Taps

